



SLIDING DOOR P50 + MK 40

- QUOTATION INQUIRY
- PURCHASE ORDER

CUSTOMER

Quotation Nr.

Quantity Identical doors

Job ref.

Date

Delivery address

Date of delivery

Contact person

Means of transport


Phone

Incoterms

e-mail

Forwarder name

Opening dimensions:

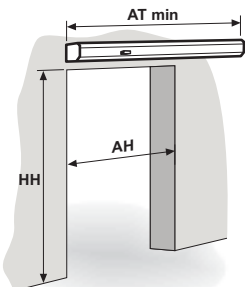

- Opening width (AH):
Clear width (PL) = AH

- Opening height (HH):
Clear height (HL) = HH

- Operator length (AT):

Single slide: AT min=(2xPL) + 150

Bi-part: AT min=(2xPL) + 100

Single slide with lead inserts: AT min=(2xPL) + 250

Bi-part hermetic with lead inserts: AT min=(2xPL) + 250

Bi-part NON hermetic with lead inserts: AT min=(2xPL) + 200

Hermetic

- 1- YES (Hermetic)
- 2- NO**


With lead inserts

- 1- YES
- 2- NO



Activation

- 1- MANUAL
- 2- AUTOMÁTIC

Opening direction

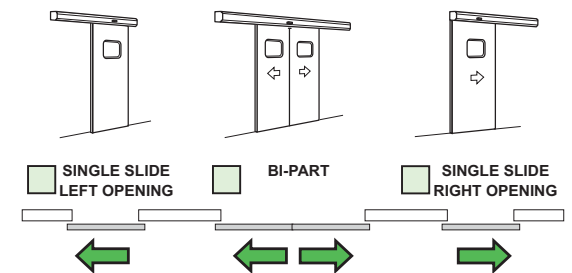

Door handles

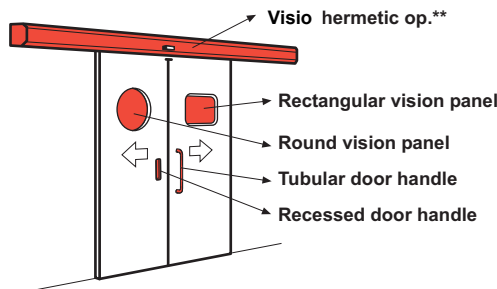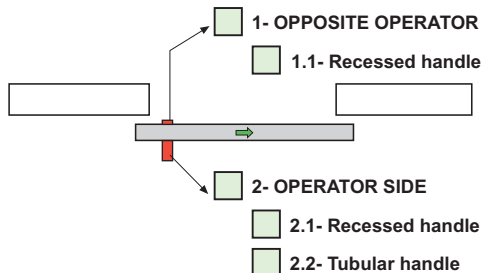

Leaf surface finish option

- 1- STAINLESS STEEL
 - 1.1- AISI 304 (standard)
 - 1.2- AISI 316 (optional)
- 2- HIGH PRESSURE LAMINATE (HPL)
 - 2.1- WHITE (standard)
 - 2.2- GREEN (standard)
 - 2.3- BLUE (standard)
- 2.5- SPECIAL

VISION PANEL

- RECTANGULAR
 - 400x400
 - 500x400*
 - 900x800*
- ROUND
 - diam. 400*
 - diam. 500*

* Not available for doors with lead inserts

Activation / detection accesories

- PLANAR RADAR _____ pcs
- OPTEX IR SENSOR _____ pcs
- PROXIMITY SWITCH _____ pcs
- OPENING PUSH BUTTON _____ pcs
- ELBOW SWITCH (white/silver, surface/recessed) _____ pcs
- IR PHOTOCCELL BARRIERS _____ pcs

Operator + ME40 finish option

- 1- ANODIZED
reference:
- 2- LACQUERED
RAL:

Special wall frame and adaptor for NON-hermetic doors with Bravo/Toro operators


- 1- KHHE02 - ADAPTOR FOR NON-HERMETIC BRAVO OPERATOR
(always order when the door is NON-hermetic and requires a wall frame)

Wall frame

- 1- DO NOT SUPPLY WALL FRAME
(as an option and ONLY FOR NON-HERMETIC DOORS, the wall frame may not be required)

Remarks

DETAIL OF WALL FRAME AND P50 DOOR LEAF

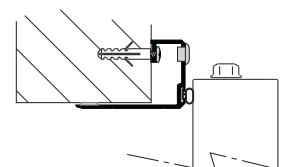

MINIMUM DELIVERY TERMS:

- STAINLESS STEEL OR HPL WITH STANDARD COLOR 4 weeks
- ST. STEEL, STANDARD HPL COLOR (WITH LEAD INSERTS) 6 weeks
- HPL WITH NON-STANDARD COLOR 9 weeks
- HPL WITH NON-STANDARD COLOR (WITH LEAD INSERTS) 9 weeks

** NON-HERMETIC DOORS WITH P50 LEAF

NON-HERMETIC doors will be quoted with a Visio operator by default
NON-HERMETIC doors with lead inserts will be quoted with a TORO operator.