



# P50 SWING DOOR

- QUOTATION INQUIRY
- PURCHASE ORDER

CLIENT

Quotation Nr.

Quantity

Identical doors

Job ref. \_\_\_\_\_

Date \_\_\_\_\_

Delivery address \_\_\_\_\_

Date of delivery \_\_\_\_\_

Contact person \_\_\_\_\_


Means of transport

Phone \_\_\_\_\_

Incoterms \_\_\_\_\_

e-mail \_\_\_\_\_

Forwarder name \_\_\_\_\_

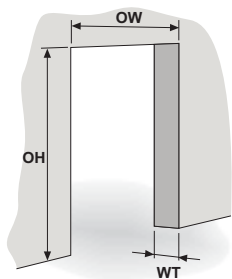

**Opening dimensions**

- Opening width (OW):   
Clear Width (CW) = AH-125

- Opening height (OH):   
Clear Height (CH) = OH - 62.5

- Wall thickness (WT):   
(min=75 / max=250. Consult factory for other dimensions)


**Hermetic**

- 1- YES
- 2- NO

**With lead inserts**


- 1- YES
- 2- NO

**Opening direction**

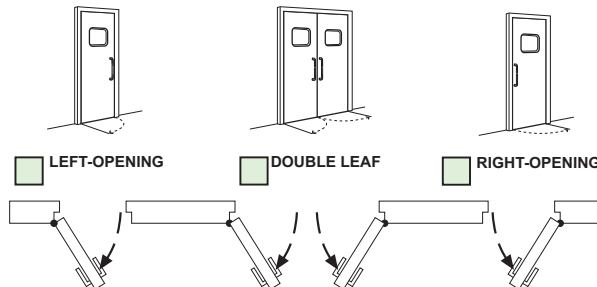


**Activation**

- 1- MANUAL
- 2- AUTOMATIC
  - 2.1- PUSH ARM
  - 2.2- PULL ARM



**Accessories**

- 1- DOOR CLOSER (only for MANUAL doors)
- 2- LEAF HANDLES
  - 2.1- Leaf handle only (only for manual doors)
  - 2.2- Leaf handle + key (only for manual doors)
  - 2.3- Leaf handle + bolt (only for manual doors)
  - 2.4- Key only
- 3- PULL HANDLE
  - 3.1- Inside
  - 3.2- Outside



**Leaf surface finish option**

- 1- STAINLESS STEEL
  - 1.1- AISI 304 (standard)
  - 1.2- AISI 316 (optional)
- 2- HIGH PRESSURE LAMINATE (HPL)
  - 2.1- WHITE (standar)
  - 2.2- GREEN (standard)
  - 2.3- BLUE (standard)
  - 2.4- BEIGE (standard)
  - 2.5- SPECIAL \_\_\_\_\_

**Vision panel**

- RECTANGULAR
  - 400x400
  - 500x400\*
  - 900x800\*
- ROUND
  - diam. 400\*
  - diam. 500\*

\* Noncompatible with radiology.


**Activation/detection accessories for auto door:**

- OPTEX SENSOR \_\_\_\_\_ uds.
- PROXIMITY SWITCH \_\_\_\_\_ uds.
- OPENING PUSH BUTTON \_\_\_\_\_ uds.
- ELBOW SWITCH \_\_\_\_\_ uds.
- BEA IR PHOTOCCELL (MICROCELL) \_\_\_\_\_ uds.
- EYE-TECH SAFETY SENSOR \_\_\_\_\_ uds.

**IMPORTANT**

In swing hermetic doors, one of these four combinations is mandatory:

	A	B	C	D
swing door operator	X	-	-	-
door closer	-	X	-	X
door handle	-	-	X	X

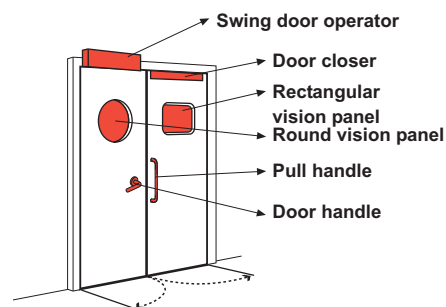

**Remarks**

\_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_

**MINIMUM DELIVERY TERMS:**

- STAINLSES STEEL OR HPL WITH STANDAR D COLOR 4 weeks
- STAINLESS STEEL OR HPL WITH ST. COLOR (X-RAY) 6 weeks
- SPECIAL HPL COLOUR 9 weeks
- SPECIAL HPL COLOUR (X-RAY) 9 weeks